


程式 66 CHIEF technique for indirect BEM

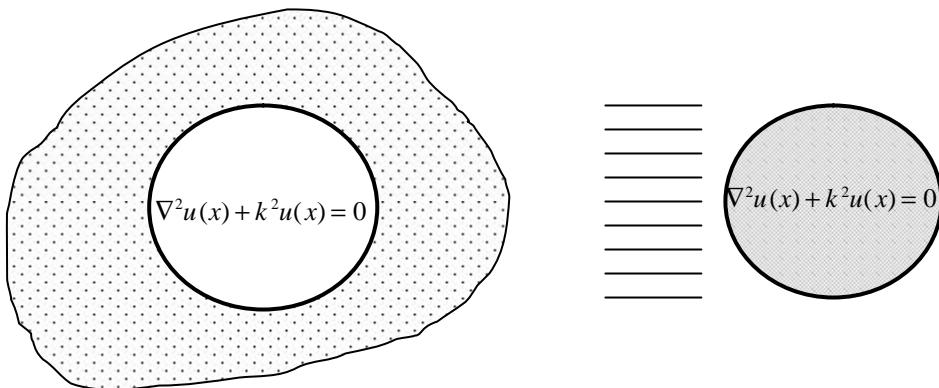

Single-layer potential approach	Double-layer potential approach
Dirichlet problem $u(x) = \int_B U(s, x) \mathbf{f}(s) dB(s)$	Dirichlet problem $u(x) = \int_B L(s, x) \mathbf{y}(s) dB(s)$
Neumann problem $t(x) = \int_B L(s, x) \mathbf{f}(s) dB(s)$	Neumann problem $t(x) = \int_B M(s, x) \mathbf{y}(s) dB(s)$
CHIEF constraints ?	

References

1. I. L. Chen, J. T. Chen, S. R. Kuo and M. T. Liang, A new method for true and spurious eigensolutions of arbitrary cavities using the combined Helmholtz exterior integral equation formulation method, Journal of Acoustical Society of America, Vol.109, No.3, pp.982-998, 2001.
2. I. L. Chen, J. T. Chen and M. T. Liang, Analytical study and numerical experiments for radiation and scattering problems using the chief method, Journal of Sound and Vibration, Vol.248, No.5, pp.809-828, 2001.
3. J. T. Chen, C. T. Chen, K. H. Chen and I. L. Chen, On fictitious frequencies using dual bem for non-uniform radiation problems of a cylinder, Mechanics Research Communications, Vol.27, No.6, pp.685-690, 2000.